




ABOVEGROUND SYSTEMS

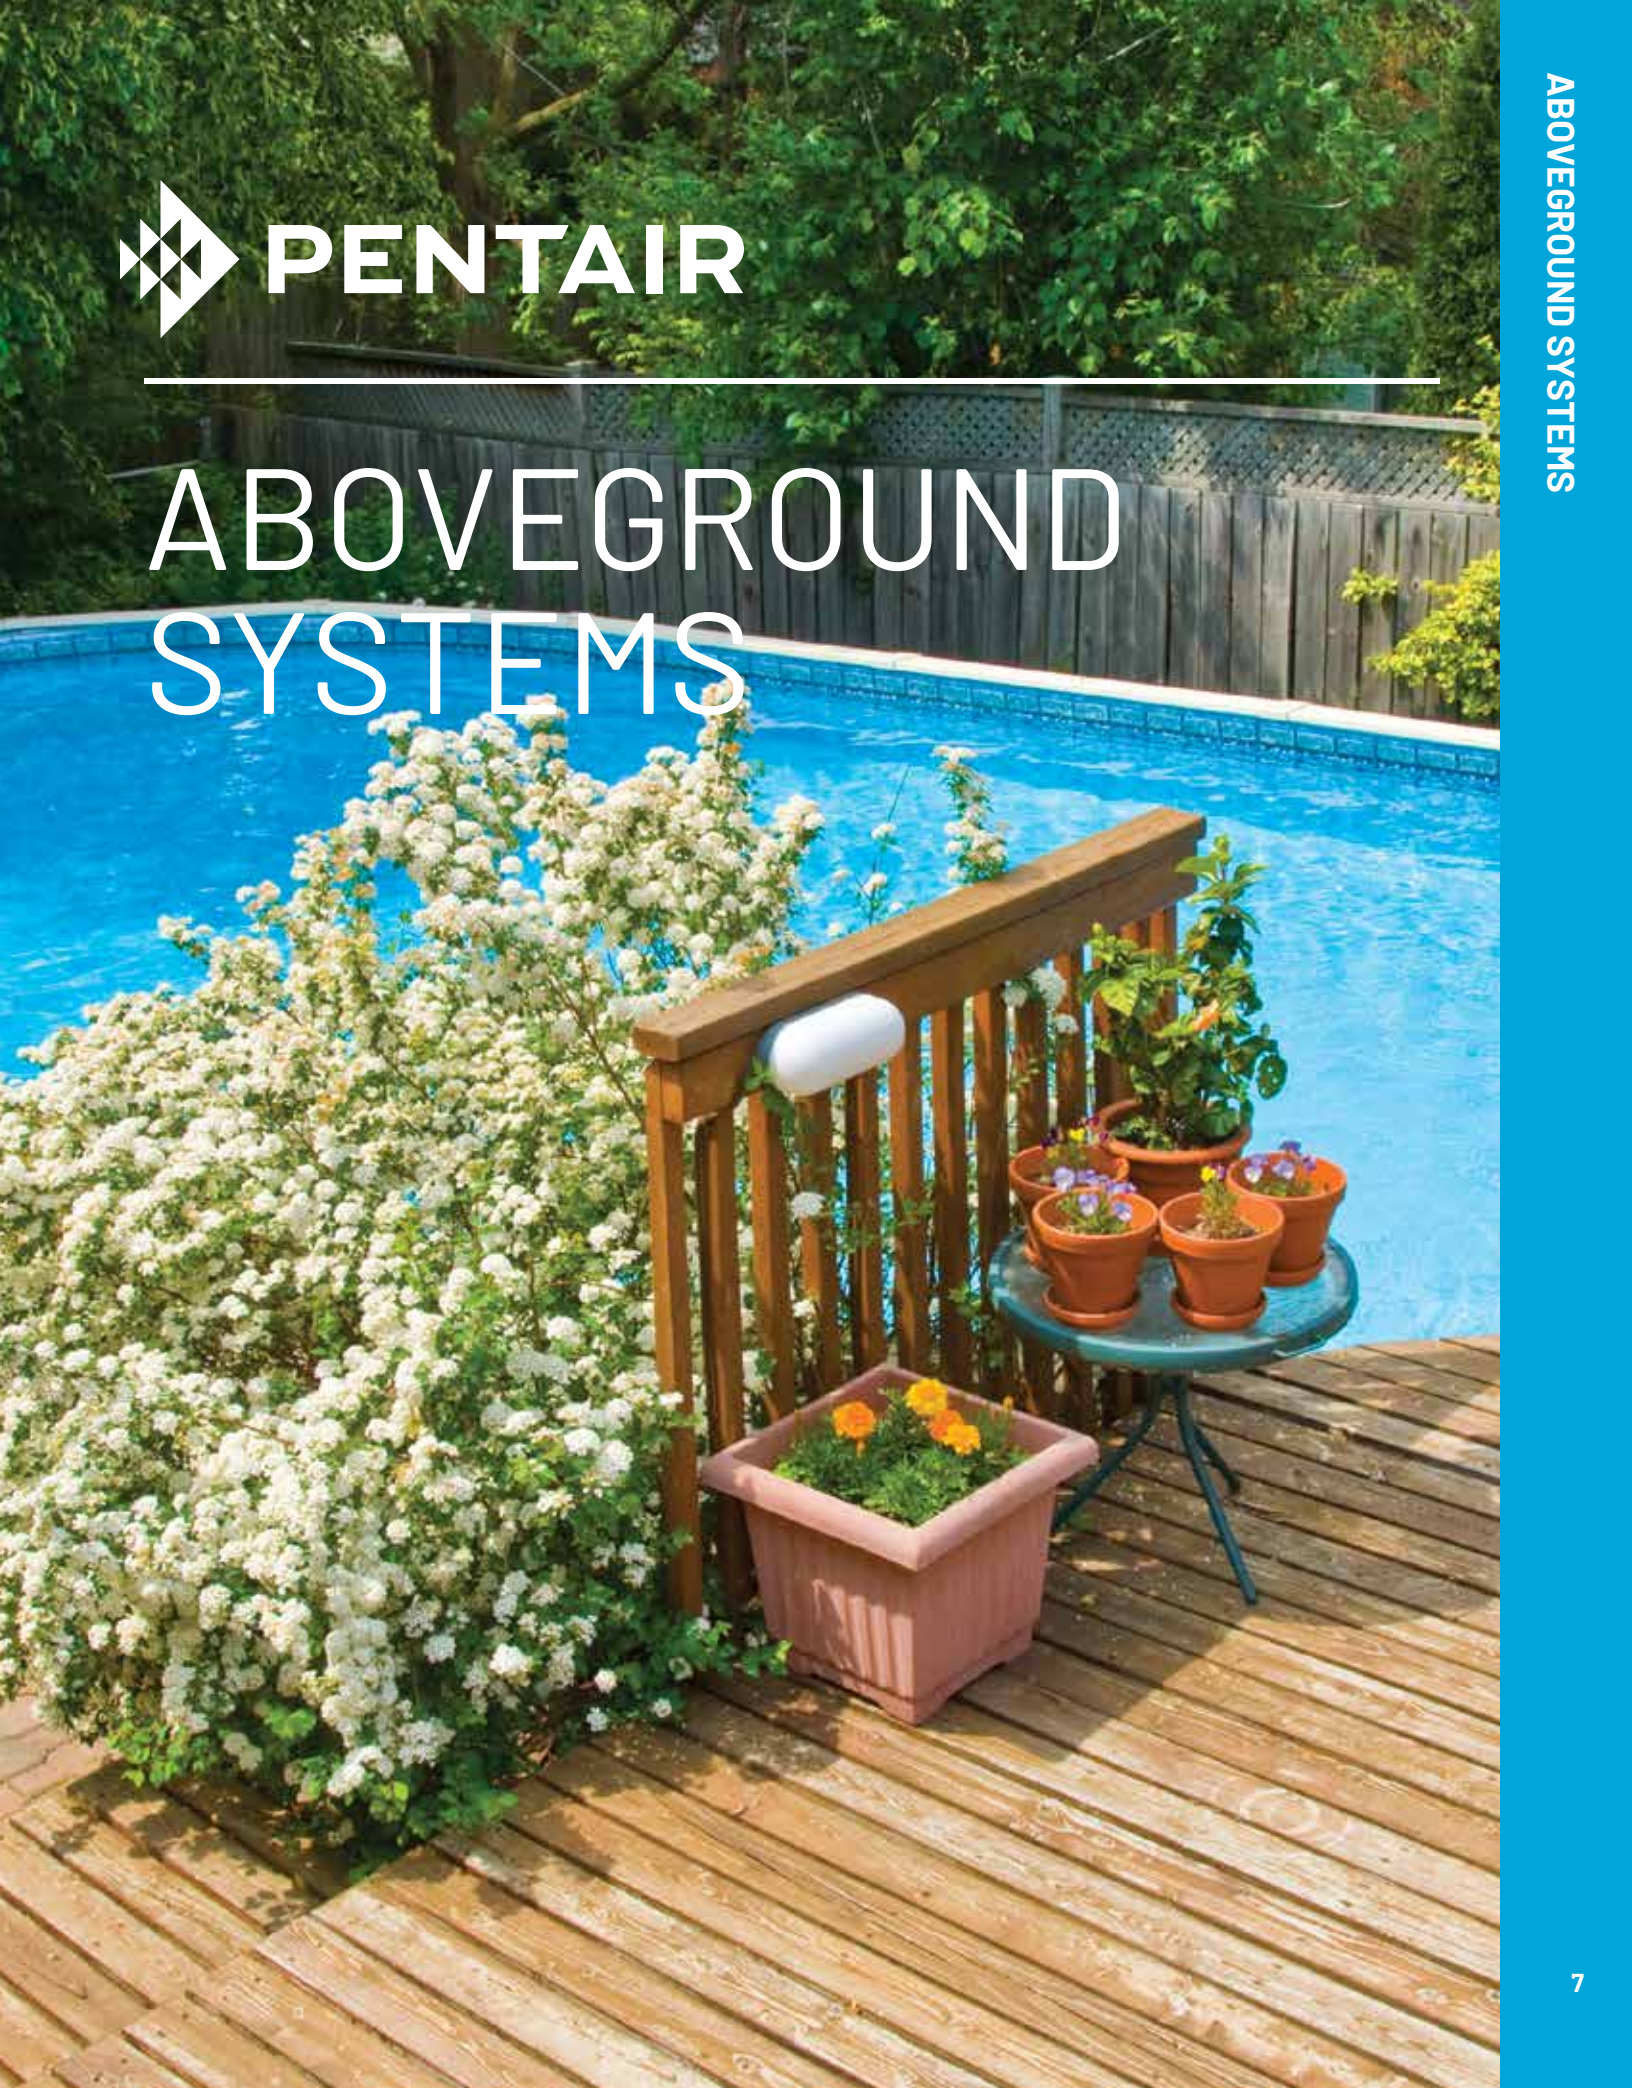

CLEAN AND CLEAR® FILTER SYSTEMS

ABOVEGROUND CARTRIDGE POOL SYSTEMS



Clean & Clear Filter System

The Clean & Clear Filter System pairs the OptiFlo® Pump with the Clean & Clear Cartridge Filter, a high quality filtration unit using a thermoplastic chemical-resistant tank. All models are equipped with easy spin-on unions for plumbing hookups.

CALIFORNIA PROPOSITION 65 WARNING
 ⚠️ **WARNING:** Cancer and Reproductive Harm.
 ⚠️ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
 www.p65warnings.ca.gov. PN20214

Featured Highlights

- Unionized pump and filter connections
- Integrated continuous High Flow™ Internal Air Relief¹
- Lock ring with spring-loaded safety latches
- Coreless media for easy cleaning
- High Flow manual air relief valve
- 1-inch drain and wash out
- Single piece base and body design

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ² Rate (GPM)	Turnover Capacity (In Gallons) ²			Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour		
CLEAN AND CLEAR SYSTEM										
PNCC0050OE1162	1.0	Standard plug 3 ft cord	6 ft	50	50	24,000	30,000	36,000	15-1/2	18
PNCC0075OE1162	1.0	Standard plug 3 ft cord	6 ft	75	75	36,000	45,000	54,000	15-1/2	25-1/2
PNCC0075OE1262	1.0	Twistlock plug 3 ft cord	6 ft	75	75	36,000	45,000	54,000	15-1/2	25-1/2
PNCC0100OE1162	1.0	Standard plug 3 ft cord	6 ft	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OE1260	1.0	Twistlock plug 3 ft cord	6 ft	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0125OE1160	1.0	Standard plug 3 ft cord	6 ft	125	125	60,000	75,000	90,000	15-1/2	33
PNCC0150OE1160	1.0	Standard plug 3 ft cord	6 ft	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OE1260	1.0	Twistlock plug 3 ft cord	6 ft	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0175OE1160	1.0	Standard plug 3 ft cord	6 ft	175	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0200OE1160	1.0	Standard plug 3 ft cord	6 ft	200	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0200OE1260	1.0	Twistlock plug 3 ft cord	6 ft	200	150	72,000	90,000	108,000	15-1/2	40-1/2
ACCESSORIES										

PNBKCCWROXXXX0 Base Kit with pump to filter connection for Clean & Clear and Optiflo Pump

Dimensions and Performance



Clean & Clear Filter



OptiFlo Pump

* 2 Speed Pump.

¹ Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

² Flow Rate and Turnover Capacity based on Filter.

See pages 347 for replacement parts.

PLM SERIES FILTER SYSTEMS

ABOVEGROUND MODULAR MEDIA FILTER SYSTEM



TRADEGRADE

Featured Highlights

- Compact Design – Fits easily in tight installations. Sleek-looking in matte black finish.
- Easy Access – The Posi-Lok™ Locking Ring is easy to use. Split-tank design permits rinse-in-place cleaning.
- Dirt Loading – Flow-balanced tank hydraulics direct water through each side of filter module. Uniform dirt-loading prevents clogging.
- Easy Reading – Information panels and top-mounted pressure gauge are positioned for easy reading



PLM Series Systems shown with OptiFlo® Pump

CALIFORNIA PROPOSITION 65 WARNING
 ⚠️ **WARNING:** Cancer and Reproductive Harm.
 ⚠️ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov P65-2015-11

Convenience and helps with a maintenance-free operation make this aboveground system a smart choice. Featuring Sta-Rite's modular media technology, these systems handle dirt loads of up to 15 times more than sand filters of equivalent size. Available with the rugged, large-capacity OptiFlo Series pump.

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Tank Diameter (In.)	Tank Height (In.)	Notes
						8 Hour	10 Hour	12 Hour			
PLM SERIES FILTER SYSTEMS											
SRPLM100OE1162	1.0	Standard plug 3 ft cord	6	100	100	48,000	60,000	72,000	15	28	—
SRPLM100OE1262	1.0	Twistlock plug 3 ft cord	6	100	100	48,000	60,000	72,000	15	28	—
SRPLM100OE13X2	1.0	CSA 25 ft cord	None	100	100	48,000	60,000	72,000	15	28	Only for sale in Canada
SRPLM150OE1162	1.0	Standard plug 3 ft cord	6	150	150	72,000	90,000	108,000	15	28	—
SRPLM150OE1262	1.0	Twistlock plug 3 ft cord	6	150	150	72,000	90,000	108,000	15	28	—
SRPLM150OE13X0	1.0	CSA 25 ft cord	None	150	150	72,000	90,000	108,000	15	28	Only for sale in Canada
SRPLM200OE1260	1.0	Standard plug 3 ft cord	6	200	150	72,000	90,000	108,000	15	28	—

¹ Flow Rate and Turnover Capacity based on Filter.

Note: Operating Limits – designed for maximum continual working pressure of 50 PSI. Water temperature maximum 104°F (40°C).

Dimensions and Performance

OptiFlo Pump

OptiFlo Pump

PLM Filter



Certified to NSF/ANSI Standard 50

See page 348 for replacement parts.

PLD SERIES FILTER SYSTEMS

ABOVEGROUND MODULAR D.E. FILTER SYSTEM



TRADEGRADE



PLD Series Systems shown with OptiFlo® Pump

Sta-Rite combines improved water quality and carefree operation in a system package. Evolution of the proven modular media technology delivers D.E. filtration in a simple, one-piece module design. Available with the rugged, large-capacity OptiFlo Series pump.

Featured Highlights

- **Easy-Open Convenience** – The Posi-Lok™ Locking Ring provides easy access for seasonal cleaning. Simply unscrew the ring and lift.
- **Holds More Dirt** – The modular-design filters incorporate a balanced-flow tank design that directs water through both sides of the modules, using every inch of its pleated surface
- **Ready to Go** – Complete system includes the Mod D.E. filter and a performance-matched pump that's ready for easy assembly on a tool-free platform

CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			D.E. Required (Lbs.)	Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour			
PLD SERIES FILTER SYSTEMS											
SRPLD050OE1162	1.0	Standard plug 3 ft cord	6 ft	30	60	28,800	36,000	43,200	15	28	28
SRPLD050OE1262	1.0	Twistlock plug 3 ft cord	6 ft	30	60	28,800	36,000	43,200	15	28	28

¹ Flow Rate and Turnover Capacity based on Filter.

Note: Operating Limits – designed for maximum continual working pressure of 50 PSI. Water temperature maximum 104°F (40°C). D.E. required: 6 lbs.

Dimensions and Performance

PLD Filter

OptiFlo Pump



EASYSYSTEM™ D.E. FILTER SYSTEMS

ABOVEGROUND D.E. POOL SYSTEMS

Featured Highlights

- Removable cartridge-style D.E. element for quick, convenient cleaning
- Automatically regenerates D.E. media during off cycle and start-up
- High Flow™ Manual Air Relief valve and continuous internal air relief work together to help eliminate air accumulation and maintain optimum filtration efficiency in single and two-speed models¹
- Filter lock ring allows for quick and easy servicing



EasyClean D.E. Filter System shown with OptiFlo® Pump

CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

The EasyClean D.E. Filter System pairs the OptiFlo® Pump with the EasyClean D.E. Filter to create this high performance system for aboveground pools. Rugged, efficient and simple to operate. The EasyClean D.E. Filter System comes in a variety of sizes to suit any aboveground pool configuration.

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ²			Tank Diameter (In.)	Tank Height (In.)	D.E. Required (Lbs.)
						8 Hour	10 Hour	12 Hour			
EASYSYSTEM FILTER SYSTEMS											
PNEC0060OE1162	1.0	Standard plug 3 ft cord	6 ft	15	60	28,800	36,000	43,200	15-1/2	25-1/2	1-1/2
PNEC0060OE1262	1.0	Twistlock plug 3 ft cord	6 ft	15	60	28,800	36,000	43,200	15-1/2	25-1/2	1-1/2
PNEC0090OE1160	1.0	Standard plug 3 ft cord	6 ft	30	90	43,200	54,000	64,800	15-1/2	40-1/2	3
PNEC0090OE1260	1.0	Twistlock plug 3 ft cord	6 ft	30	90	43,200	54,000	64,800	15-1/2	40-1/2	3

¹ Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

² Flow Rate and Turnover Capacity based on Filter.

Dimensions and Performance

OptiFlo Pump



SAND DOLLAR® FILTER SYSTEMS

SAND FILTER SYSTEM WITH BLOW-MOLDED TANK



Sand Dollar Filter System

Our blow-molded process creates a one piece, non-corrosive tank of outstanding strength and durability. This pump and filter system provides excellent performance at an affordable price.

Featured Highlights

- Six-position 1-1/2 in. multiport valve
- New 1.0 THP OptiFlo® Pump
- Our innovative process creates a one-piece, non-corrosive tank of strength and durability even in the most demanding of applications
- Combination water and sand drain makes servicing and winterizing fast and easy
- Unionized Pump to Filter connection

CALIFORNIA PROPOSITION 65 WARNING

⚠️ **WARNING:** Cancer and Reproductive Harm.
 ⚠️ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ **ADVERTENCIA:** Cáncer y Daño Reproductivo.

www.p65warnings.ca.gov PN650714

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Tank Diameter (In.)	Tank Height (In.)	Sand Required (Lbs.)
						8 Hour	10 Hour	12 Hour			
SAND DOLLAR FILTER SYSTEMS											
PNSD0035OE1160	1.0	Standard plug 3 ft cord	6 ft	1.4	35	16,800	21,000	25,200	16	28-1/2	100
PNSD0035OE11X0	1.0	Standard plug 3 ft cord	None	1.4	35	16,800	21,000	25,200	19	34	150
PNSD0040OE1162	1.0	Standard plug 3 ft cord	6 ft	1.8	40	19,200	24,000	28,800	19	34	150
PNSD0040OE11X0	1.0	Standard plug 3 ft cord	None	1.8	40	19,200	24,000	28,800	19	34	150
PNSD0040OE1260	1.0	Twistlock plug 3 ft cord	6 ft	1.8	40	19,200	24,000	28,800	19	34	150
PNSD0060OE1160	1.0	Standard plug 3 ft cord	6 ft	2.3	60	28,800	36,000	43,200	22	35-1/2	250
PNSD0060OE11X0	1.0	Standard plug 3 ft cord	None	2.3	60	28,800	36,000	43,200	22	35-1/2	250
PNSD0060OE1260	1.0	Twistlock plug 3 ft cord	6 ft	2.3	60	28,800	36,000	43,200	22	35-1/2	250

¹ Flow Rate and Turnover Capacity based on Filter.

Dimensions and Performance



See pages 351 for replacement parts.

CRISTAL-FLO™ II FILTER SYSTEMS

ABOVEGROUND SAND FILTER SYSTEM



TRADEGRADE

Featured Highlights

- Less Maintenance – Enjoy greater time between cleanings. The tank's sophisticated design distributes water evenly to maximize efficiency throughout filtration media.
- One-piece polyethylene tank will never corrode
- Multi-port valve selector activates backwashing action with one quick turn
- Easy-to-read top-mounted pressure gauge
- Unionized pump to filter connection allows for easy installation and servicing



Cristal-Flo II Filter System shown with OptiFlo® Pump

Easy-maintenance sand filter system with the rugged, large capacity OptiFlo Series pump. Low maintenance and simple installation make this system the choice for many applications.

Ordering Information

Product	Pump THP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Tank Diameter (In.)	Tank Height (In.)	Sand Required (Lbs.)	Notes
						8 Hour	10 Hour	12 Hour				
CRISTAL-FLO II FILTER SYSTEMS												
SRCF2016OE1160	1.0	Standard plug 3 ft cord	6 ft	1.4	35	16,800	21,000	25,200	16	28-1/2	100	—
SRCF2019OE1160	1.0	Standard plug 3 ft cord	6 ft	1.8	40	19,200	24,000	28,800	19	34	150	—
SRCF2019OE1260	1.0	Twistlock plug 3 ft cord	6 ft	1.8	40	19,200	24,000	28,800	19	34	150	—
SRCF2019OE13X0	1.0	CSA 25 ft cord	None	1.8	40	19,200	24,000	28,800	19	34	150	Only for sale in Canada
SRCF2022OE1160	1.0	Standard plug 3 ft cord	6 ft	2.3	60	28,800	36,000	43,200	22	35-1/2	250	—
SRCF2022OE1260	1.0	Twistlock plug 3 ft cord	6 ft	2.3	60	28,800	36,000	43,200	22	35-1/2	250	—

¹ Flow Rate and Turnover Capacity based on Filter.

CALIFORNIA PROPOSITION 65 WARNING
 ⚠️ **WARNING:** Cancer and Reproductive Harm.
 ⚠️ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov PA 202514

Dimensions and Performance

OptiFlo Pump



See page 352 for replacement parts.

ACCESSORIES

FOR ABOVEGROUND SYSTEMS

A suitable ground fault interrupter (GFCI) should always be installed on aboveground system equipment.

Product	Description
ACCESSORIES	
79137800	3 ft. Standard cord
155234	3 ft. cord with twist lock
155151	1-1/2 in. x 6 ft. hose kit, (to and from pool)
155005	1-1/2 in. x 12 ft. hose kit, (to and from pool)
150046	Hose adapter 1-1/2 in. NPT with Chlorinator connector
542413	Aboveground wall fitting 1-1/2 THD x 1-1/2 THD-white
542414	Aboveground wall fitting 1-1/2 THD x 1-1/2 socket-white
98600000	AquaLuminator aboveground light
98610002	AquaLuminator aboveground light - (Canada CSA) certified
K50600	Kreepy Krauly E-Z Vac Pool Cleaner
360100	Kreepy Krauly 'Lil Shark Pool Cleaner
360321	Kreepy Krauly 910 Robotic Aboveground Cleaner
542090	Sand Vac - empties a sand filter in 10 min for repair, refilling or removal
R171016	300 Series Off-Line Chlorinator Feeder
98605300	Quasar Non-Return Light
79203100	Adapter to connect AquaLuminator to cleaner
79100000Z	Fountain attachment, fits all AquaLuminator models
79202900	Hard plumbing adapter



AquaLuminator 98600000



3 ft. Twist Lock cord 155234


CALIFORNIA PROPOSITION 65 WARNING
 ⚠️ **WARNING:** Cancer and Reproductive Harm.
 ⚠️ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov PA 200714

300 Series Chlorinator/Feeder R171016



6 ft. Hose Kit 155151
 12 ft. Hose Kit 155005

Quasar Non-return light for Aboveground Pools 98605300



Pressure Cleaner Adapter



Fountain Attachment




Hard Plumbing Adapter



Sand Vac 542090

PART NUMBERING SCHEME FOR ABOVEGROUND SYSTEMS

ex. PNSD0035DD1160

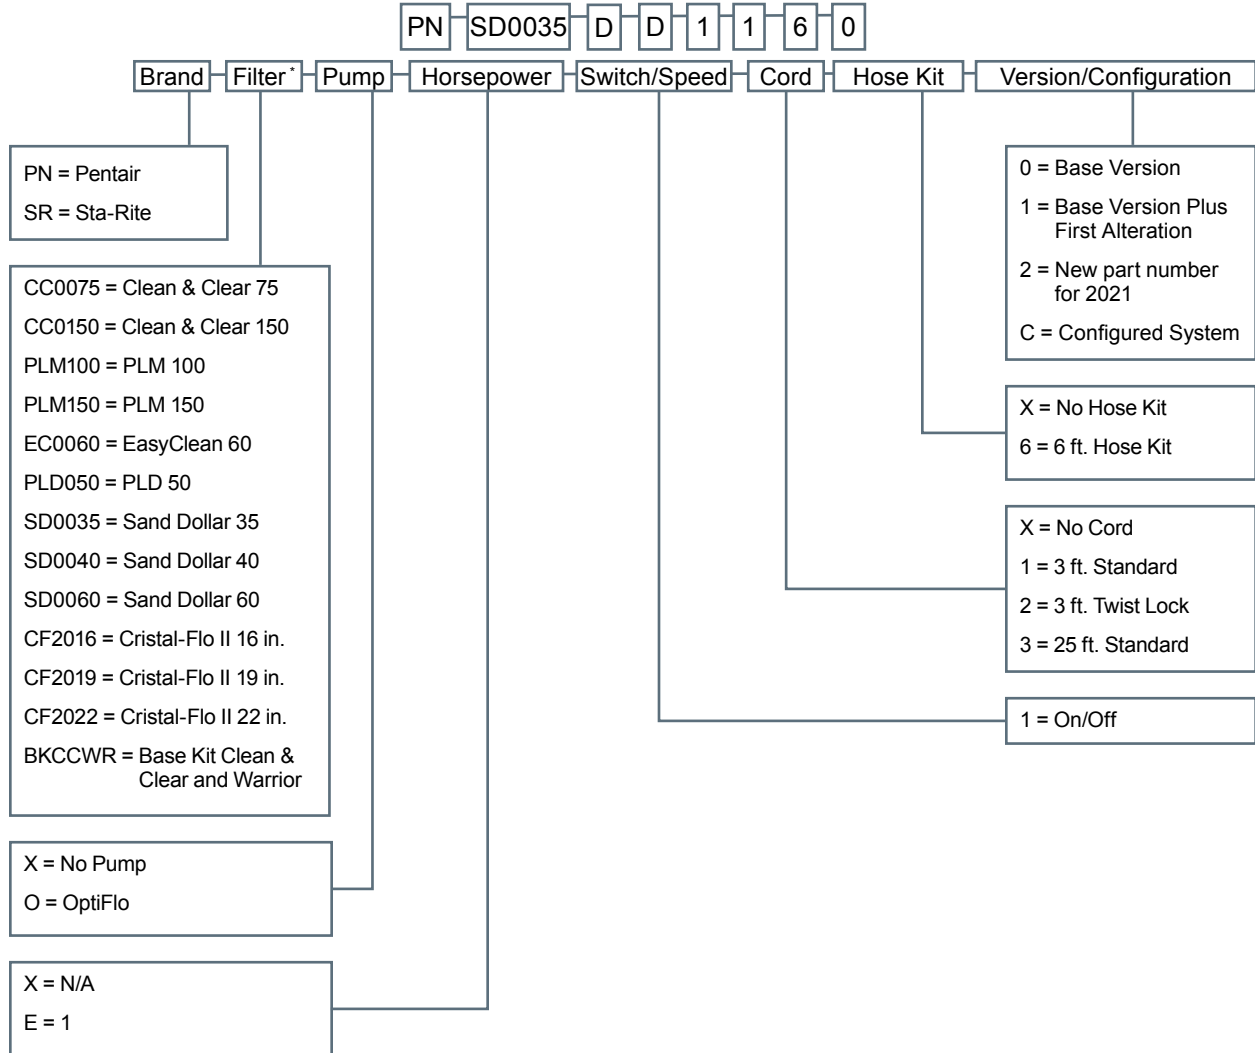

* Filter list may not represent all available types and sizes.

