

# HYDROMATIC® HPUSP125 UTILITY SINK PUMP

Perfect for basement wet bars, laundry and utility sinks.

- Fully automatic operation
- Complete compact system
- Designed to be used with a sink where gravity drain line is not available
- Up to 40 gpm with 14' head
- Easy to install
- Eliminates the need for traps, vents and costly labor
- Quiet, trouble-free operation
- Easily mounts beneath your sink



# HYDROMATIC® HPUSP125 UTILITY SINK PUMP

## Specifications

- Housing – thermoplastic
- Power Cord – 8' grounded three-prong, type SJTW
- Liquid Temperature – 32–120°F (0–50°C)
- Motor – 1/3 HP
- Electrical – 115V, 4.0 amps, 1-phase, 60 Hz

## Parts Included

- Pump Assembly
- Strainer Cup
- 1-1/4" Shut-off (flow balancing valve)
- 1-1/4" Check Valve


## Ordering Information

Catalog Number	HP	Voltage	Amps	Phase	Hz	Cord Length	Approx. Wt. Lbs.
HPUSP125	1/3	115	4.0	1	60	8'	15

## Pump Performance

Catalog Number	Gallons Per Minute at Discharge Head in Feet			
	0'	4'	8'	12'
HPUSP125	40	34	22	4

## Pump Installation

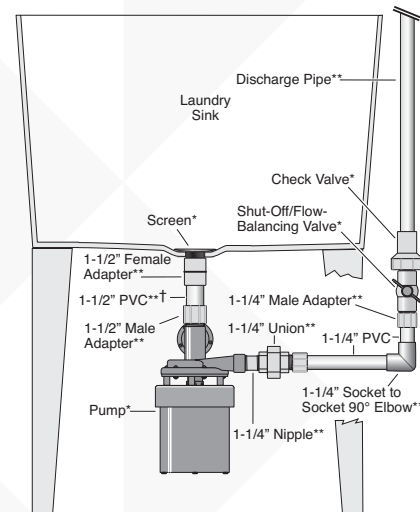

\* Required and included  
 \*\* Purchase separately  
 † For easier removal for servicing or cleaning, install a 1-1/2" solvent union in the drop pipe.



USA  
 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.HYDROMATIC.COM  
 PH: 888-957-8677 ORDERS FAX: 800-426-9446

CANADA  
 269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5  
 PH: 519-896-2163 ORDERS FAX: 519-896-6337

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.