





CONVERTIBLE JET PUMPS



MODEL 3210C 1 HP
MODEL 3207C 3/4 HP
MODEL 3205C 1/2 HP

- Superior performance at depths to water of 70' or less
- Rugged cast iron construction
- Ready-to-install, heavy-duty, dual-voltage motor 1/2 HP preset at 115V; 3/4 and 1 HP models preset at 230 volts
- Self-priming after pump housing is initially filled, check valve or foot valve required
- Pre-wired pressure switch preset for 30-50 PSI operation
- Ejector Kit included

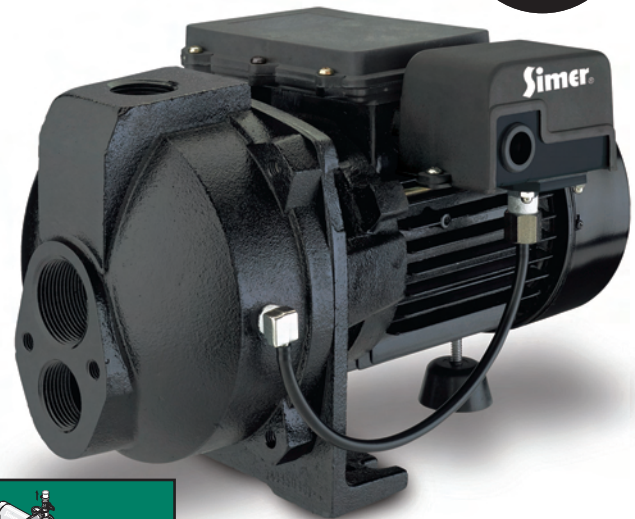

PERFORMANCE – Shallow Well of 25 Feet or Less

Model	HP	Warranty	Voltage	Amps	Pressure Switch		GPM Pumped at Different Depths to Water*					Pressure Shut-off
					On	Off	0'	5'	10'	15'	20'	
3210C	1	1-year	115/230	11.0/5.5	30	50	17.0	15.0	13.5	12.5	10.0	70 PSI
3207C	3/4	1-year	115/230	11.0/5.5	30	50	16.0	14.5	13.5	12.0	10.0	70 PSI
3205C	1/2	1-year	115/230	7.0/3.5	30	50	10.0	9.5	9.0	8.0	6.5	70 PSI

PERFORMANCE – Deep Well With 4" Diameter Casing or Larger

Model	GPM Pumped at Different Depths to Water*					Pressure Shut-off
	30'	40'	50'	60'	70'	
3210C	10.0	8.0	6.0	4.5	3.5	65 PSI
3207C	8.0	6.0	4.5	3.5	2.5	65 PSI
3205C	5.0	4.0	3.0	2.5	2.0	65 PSI

*All performances shown in gallons per minute at 40 PSI (pound per square inch) discharge pressure at top of well.

ORDERING INFORMATION

Model	UPC	Carton (L x W x H)	Cube	Pallet Qty.	Weight
3210C	0 22315 36163 8	19" x 10.82" x 10.5"	1.249	24	46 lbs.
3207C	0 22315 36302 1	19" x 10.82" x 10.5"	1.249	24	45 lbs.
3205C	0 22315 36162 1	19" x 10.82" x 10.5"	1.249	24	38 lbs.